boyser®

Industrial Peristaltic Pumps

AMP-13B Data sheet

Capacity:	0,038 l/rev.
Connections:	3/8”
Max. Pressure:	8 bar
Rotor system:	Rollers
Available hoses:	NR
	NBR
	EPDM
	HYPALON
	NR-A
	NBR-A
Available tubes:	Norprene

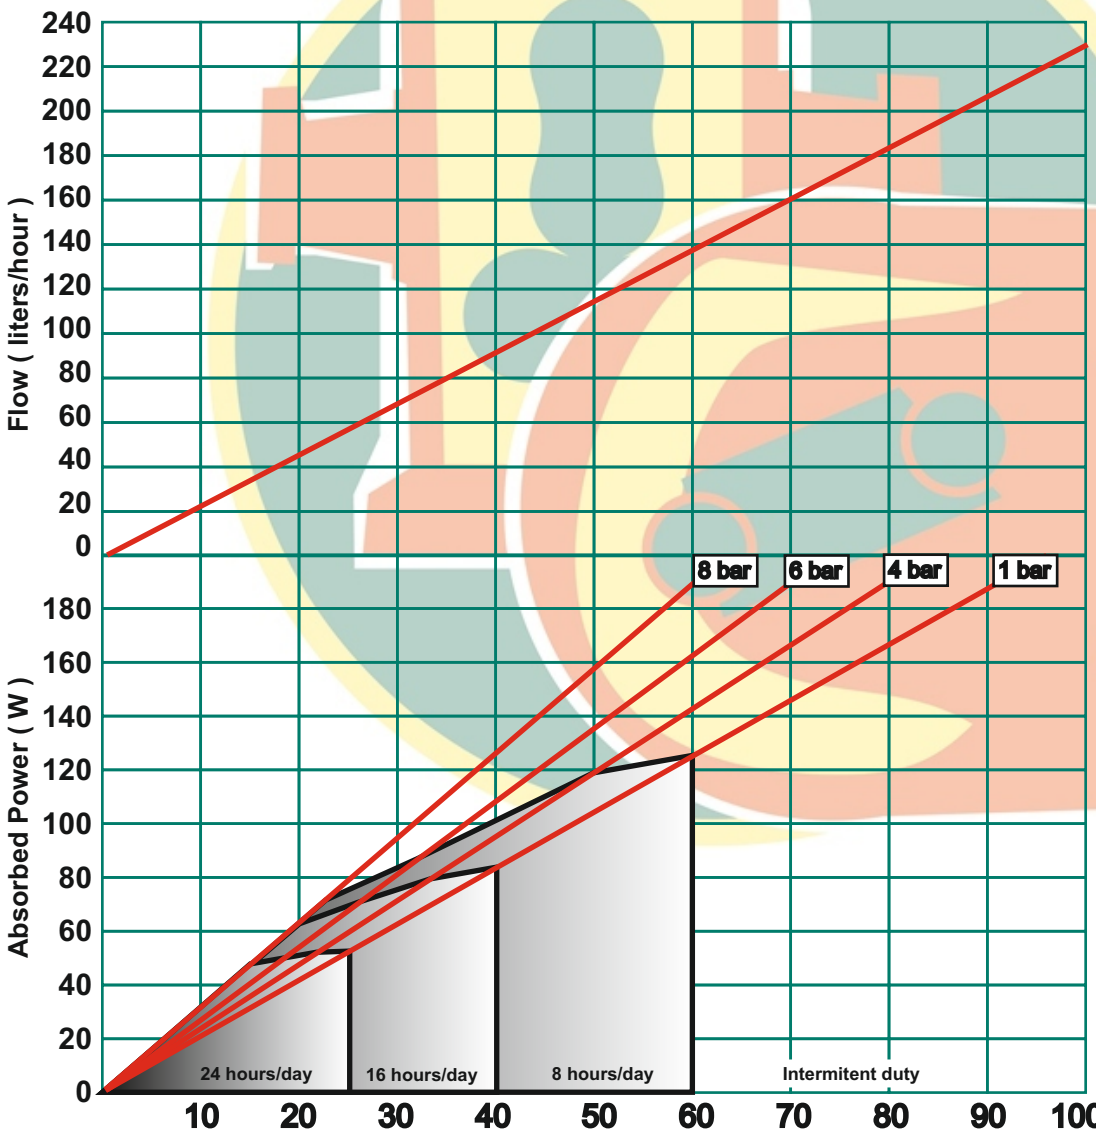

Pressure (bar)	Torque (Nm)
1	20
4	23
6	26
8	30

1.9.2.2 AMP-13B data sheet - 7/2015

Description	Material	Surface treatment
Pump housing	Alluminium EN-AC-44100	Polyester powder coated Halar coated (Optional)
Front cover	Methacrylate	--
Rotor	Nodular Cast Iron EN-GJL-400	Cataforesis
Rollers	Steel F-114	Blueing
Base plate	Steel F-111 Stainless Steel AISI-304 (Optional)	Polyester powder coated --
Connections	Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	--

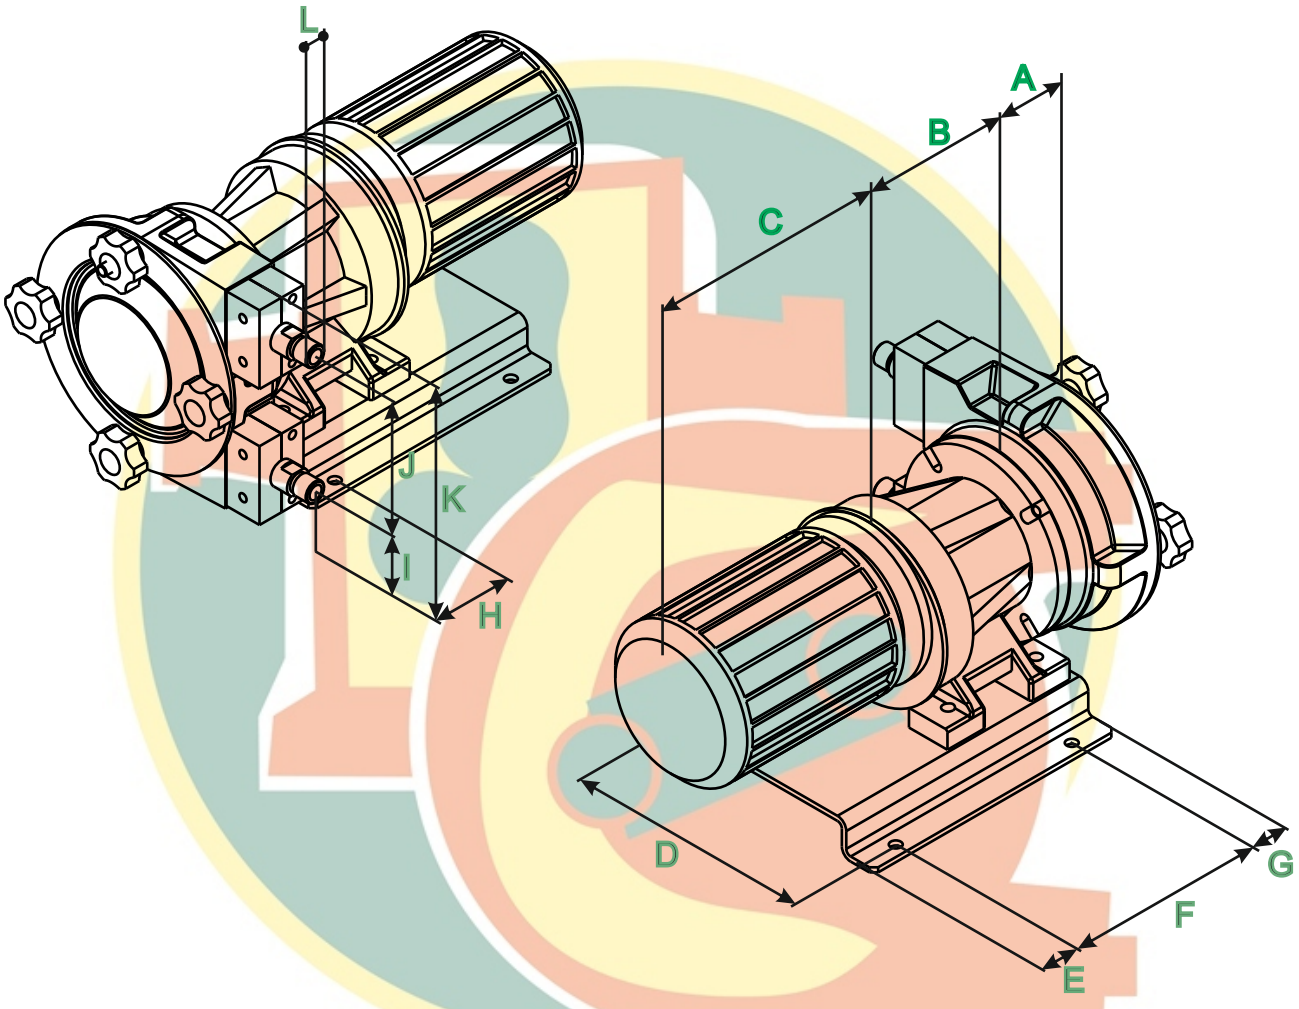

A	B	C	D	E	F	G	H	I	J	K	L
70	*	*	190	30	160	30	61	60	115	210	3/8" BSP

Bombas Boyser, S.L. C/. Narcís Monturiol, 24 · Pol. Ind. Can Magre
Telf.: 93 844 77 78 · 08187 Sta. Eulàlia de Ronçana (BARCELONA)
info@boyser.com · www.boyser.com