boyser®

Industrial Peristaltic Pumps

AMP-19D Data sheet

Capacity:	0,123 l/rev.
Connections:	1”
Max. Pressure:	2 bar
Rotor system:	Rollers
Available hoses:	--
Available tubes:	Norprene
	Tygon

Pressure (bar)	Torque (Nm)
2	20

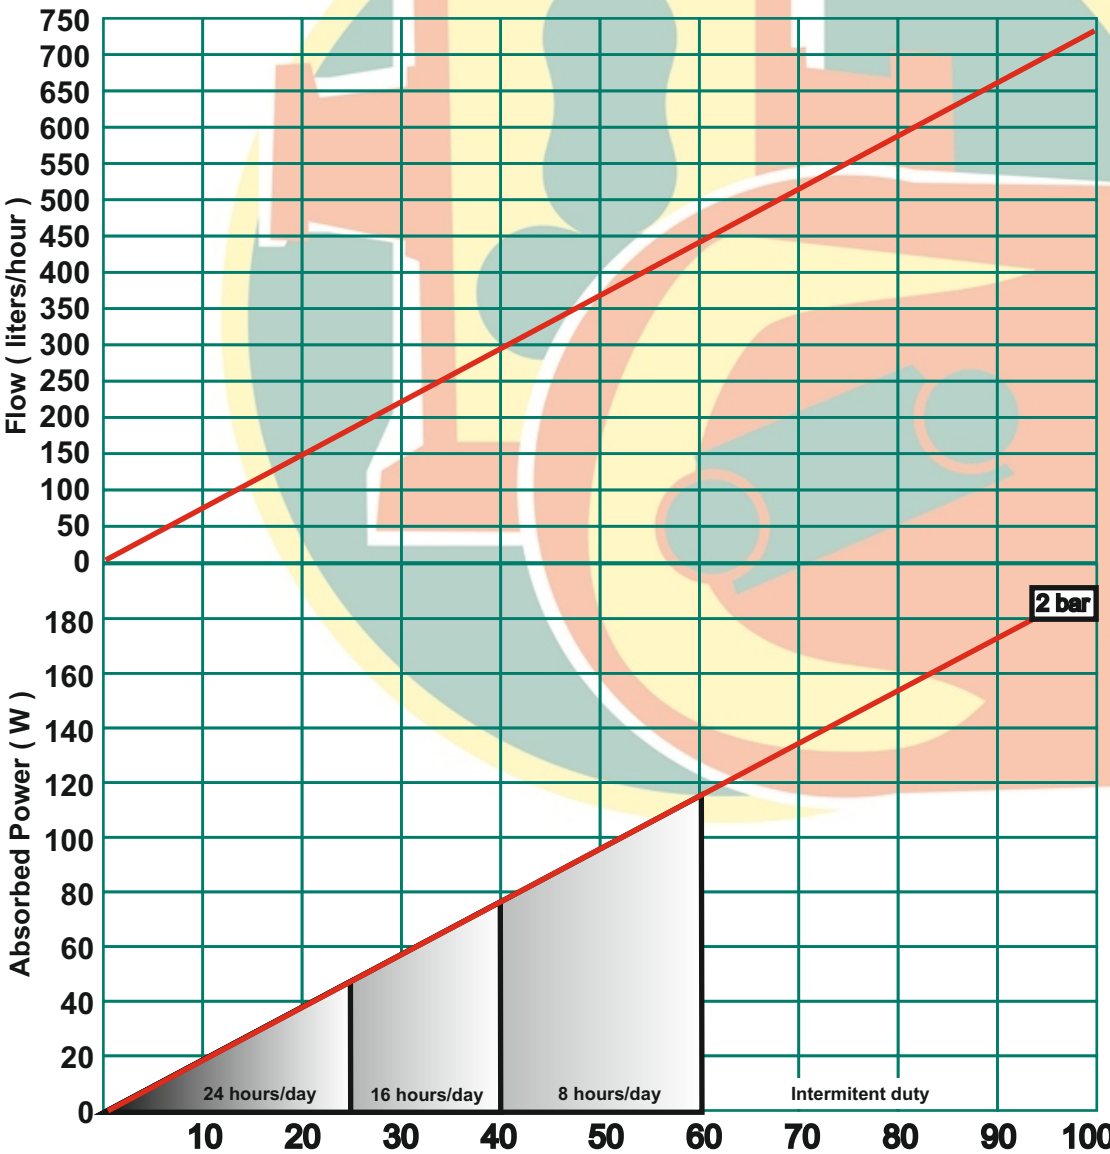

1.9.2.4 AMP-19D data sheet - 7/2015

Description	Material	Surface treatment
Pump housing	Alluminium EN-AC-44100	Polyester powder coated Halar coated (Optional)
Front cover	Steel F-111 / Polycarbonate	Polyester powder coated Halar coated (Optional)
Rotor	Nodular Cast Iron EN-GJL-400	Cataforesis
Rollers	Steel F-114	Blueing
Base plate	Steel F-111 Stainless Steel AISI-304 (Optional)	Polyester powder coated --
Connections	Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	--

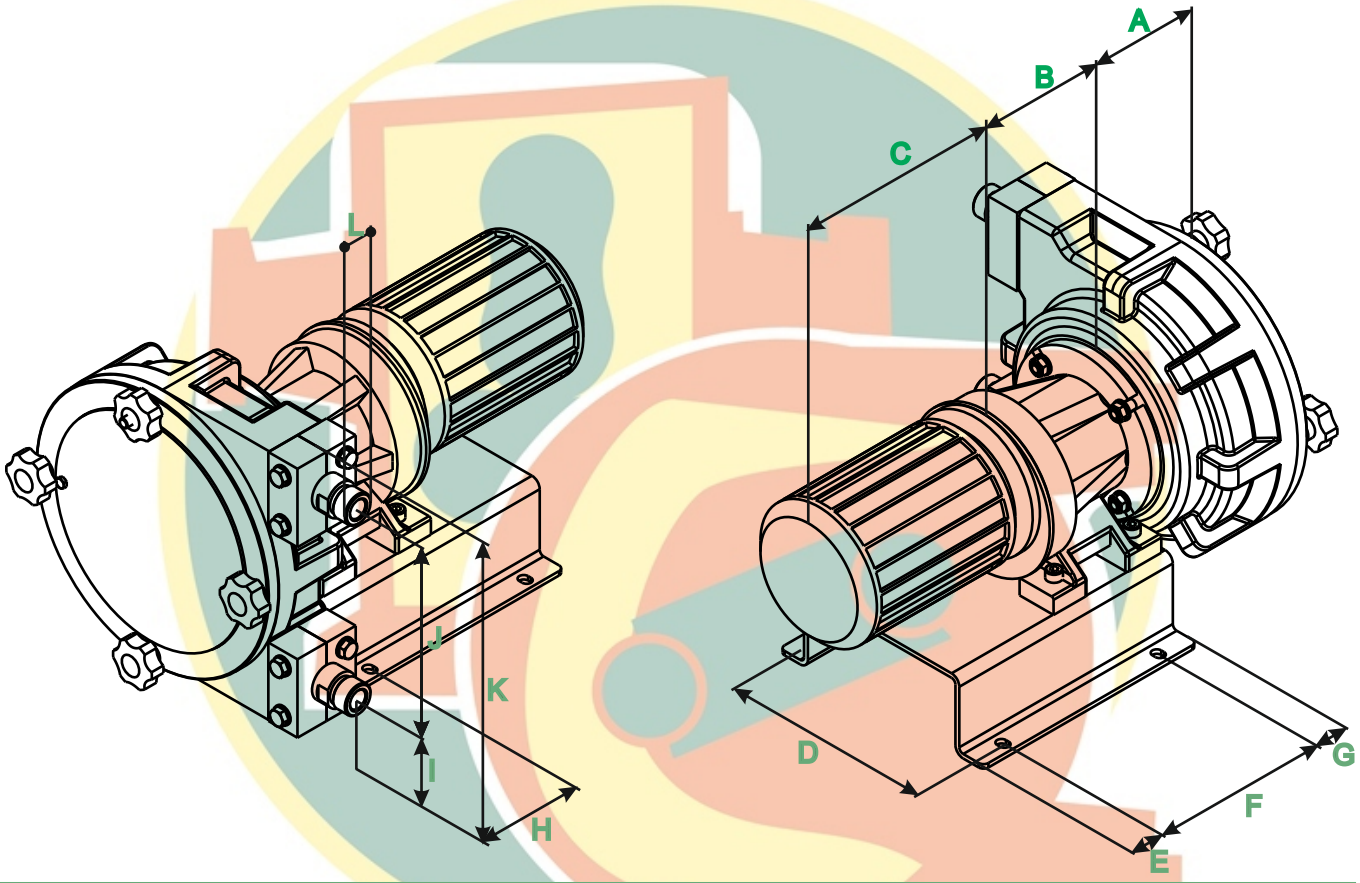

A	B	C	D	E	F	G	H	I	J	K	L
119	*	*	190	30	160	30	75	60	170	265	1" BSP

*** To confirm according type and power driver.**

Bombas Boyser, S.L. C/. Narcís Monturiol, 24 · Pol. Ind. Can Magre
Telf.: 93 844 77 78 · 08187 Sta. Eulàlia de Ronçana (BARCELONA)
info@boyser.com · www.boyser.com