

Cross Type In-Line Sight Glass

The Saniquip cross type in-line sight glass comprises of a stainless steel frame with two flat tempered viewing glasses directly opposite each other in a clamp union.

Features

- No retention, zero dead angle design
- Sizes 1" to 4" available
- Available in AISI 304 or 316L
- Gasket materials in EPDM or NBR, FDA 177.2600 compliant
- Connections in butt weld or clamp
- Optional light fitting available



Wired Cable Connetion
(24V DC)




Wireless power supply
(rechargeable battery)



Working Pressure:	10 bar maximum
Working Temperature:	-10°C - 130°C


Dimensions

Cross type sight glass - standard

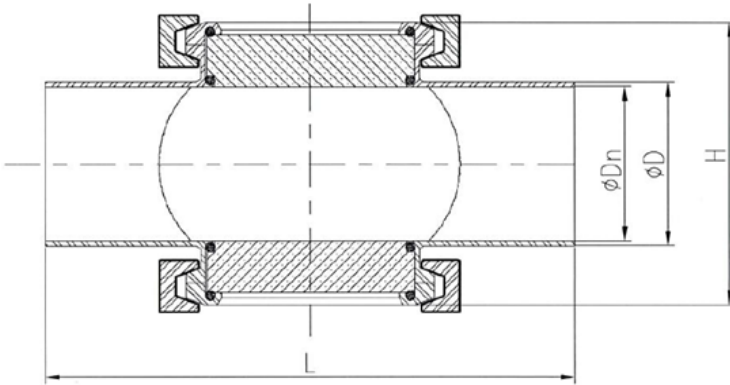

Size	D (mm)	Dn (mm)	H (mm)	L (mm)
1"	25.4	22.4	62.4	150
1.5"	38.1	35.1	75.1	165
2"	50.8	47.8	87.8	165
2.5"	63.5	59.5	101.5	205
3"	76.2	72.2	114.2	230
4"	101.6	97.6	141.6	300

Cross type sight glass - with light fitting on one sight glass (shown below is the rechargeable battery operated type)

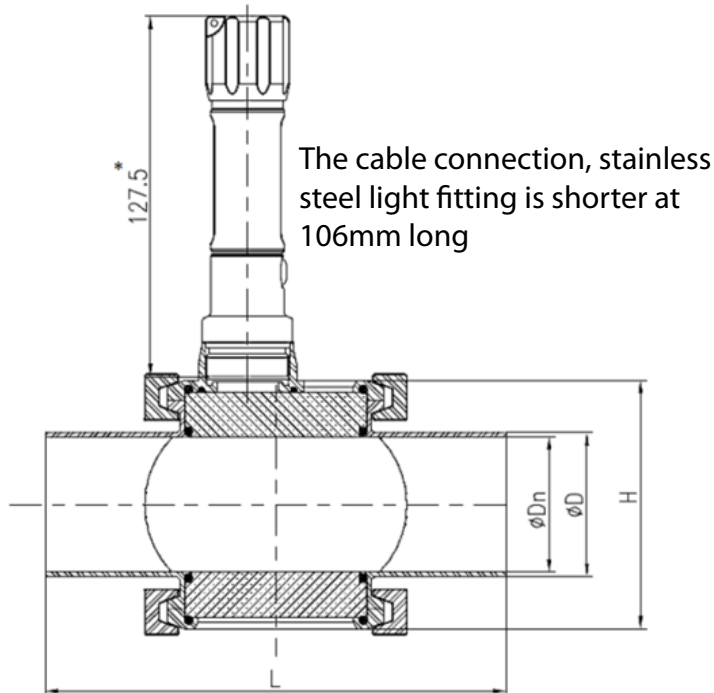

Size	D (mm)	Dn (mm)	H (mm)	L (mm)
1"	25.4	22.4	62.4	150
1.5"	38.1	35.1	75.1	130
2"	50.8	47.8	87.8	165
2.5"	63.5	59.5	101.5	205
3"	76.2	72.2	114.2	230
4"	101.6	97.6	141.6	300

Saniquip Stainless Ltd

PO Box 58722, Botany, Auckland 2163, New Zealand
 Unit 9, 135 Cryers Road, East Tamaki, Auckland 2013, New Zealand

Phone +64 9 274 5570 or +64 9 274 5571

Email sales@saniquip.co.nz Website www.saniquip.co.nz